

Powerline HD Multimedia Adapter **Home:Link 3200** **Modelno: HL3200**



Introduksjon

Jensen Home:Link™ 3200 er perfekt for å koble sammen PCer, HD media spillere, spillkonsoller, nettverklagringsenheter og set-top bokser!

Plugg inn Jensen Home:Link™ 3200 i stikkontakten og gjør ditt hjem eksisterende strømmett til nettverkstilkobling!

Quality of Service (QoS)

Innebygget QoS sørger for kvalitetsmessig riktig båndbredde for dine applikasjoner - IPTV, bredbånd, online-gaming, VoIP, lyd-bilde overføring osv.

Trykknapp

En enkel knapp som sørger for tilkobling av flere adaptere og aktiverer sikkerhet samtidig..

Sikkerhet

Innebygget 128-bit AES kryptering

Enkel installasjon

Home:Link 3200 leveres med Online manual som gjør installasjon meget enkel.

Veiledning på ditt lokale språk

Veiledning på ditt lokale språk; Norsk, Svensk, Dansk, Finsk og Engelsk.


Gratis Support

3 måneders GRATIS support på alle produkter

Garanti / Bytte-Garanti

Vi gjør det enkelt for våre kunder – vi garanterer for alle våre produkter i hele 3 år fra du har kjøpt produktet.

I tillegg tilbyr vi en av de beste bytte-garantier på markedet!

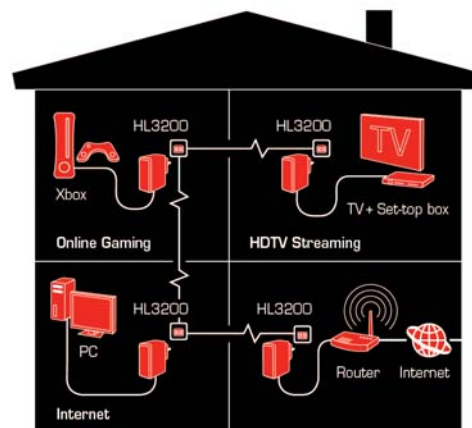

Powerline HD Multimedia Adapter

Home:Link 3200

Modelno: HL3200

Technical information

Product name

- Jensen Home:Link 3200

Protocol/standards

- HomePlug AV 1.0 specification, IEEE 802.3 10/100 Ethernet (100 Mbps) and IEEE 802.3u Fast Ethernet
- 10/100 Mbps AutoMDI/MDIx Support
- Co-exists with existing 14 Mbps HomePlug 1.0 and 85 Mbps Turbo HomePlug 1.0

Modulation support

- OFDM 1024/256/64/16/8 QAM, QPSK,
- BPSK and ROBO Modulation Scheme

Frequency Band

- 2 MHz to 28 MHz band

Quality of Service

- TDMA channel access with Contention-Free and Contention-Based (CSMA/CA) period
- Channel Adaptation ensures that signal integrity is maintained even under harsh noise environment
- Four Level prioritized random access method based on contention access and multisegment
- ToS and CoS Packet Classifier
- Supports IGMP managed multicastsession

Software/security support

- Windows 98SE, 2000, ME, XP 32 bit and Vista 32 bit

Hardware

- Intellon INT6300 Integrated Single-chip

Platform support

- OS Independent with TCP/IP protocol installed

Power supply

- Switch Mode 100 V – 240 V supply with Europe plug

LED indicators

- 1 x Power LED
- 1 x Powerline Link /Activity status LED
- 1 x Ethernet Link /Activity status LED

External connectors

- 1 x Electrical power plugs
- 1 x RJ45 for 10/100 Ethernet (AutoMDI/MDI-X)

Push button

- Set up network password automatically (for inter-communication of Homeplugs)

Environment

- Operating temperature: 0°– 40°C
- Non-operating temperature: -25°– 70°C
- Operating humidity: 30% to 80% relative humidity
- Non-operating humidity: 30% to 95% relative humidity

Package content

- 2 x Jensen Home:Link™ 3200
- 2 x Ethernet cables
- CD with Online Manual
- English User Manual
- Local Quick Installation Guide
- Warranty Card

